


PRESSURE GAUGES

PG-35

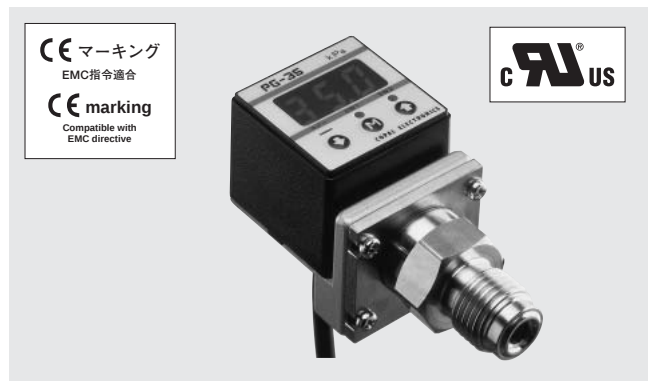

FEATURES

● **Both absolute pressure type and compound pressure type are available**

Compound pressure type measures negative and positive gauge pressure.

● **Compact and lightweight general-purpose pressure gauges**

Innovative general-purpose gauges of compact design (30mm sq.) and drip-proof structure (IP-65).

● **Clear indication by LED**

Easy-to-see LED assures clear readings on the panel and even in a dark place.

● **Various modes and units can be selected according to applications**


Eight different pressure units
Three analog output modes
Eight switch output modes

● **Meet EMC standards**

EN 55011 (EMI)
EN 61326-1 (EMS)

● **Low consumption by nondisplay mode**

● **Set data protection by panel lock function**

INTERNAL STRUCTURE
(R 1/4)

Part name		Material
①	Fitting	SUS316L
②	Sensor module	SUS316L
③	Adaptor	Aluminum
④	FPC	Polymide
⑤	Case	PBT (Polybutyleneterphthalate)
⑥	Panel sheet	Polyester
⑦	“O” ring	NBR
⑧	Sensor holder	SUS316L

PG-35

PRESSURE GAUGES

MODEL NUMBER DESIGNATION

High corrosion resistance type

P G - 3 5 - 1 0 2 R - N R 2 B

Series name

Pressure range

102R : - 100 ~ 100 kPa (Compound pressure [Negative pressure ~ Positive pressure])
 102A : 0 ~ 100 kPa (Absolute pressure [Absolute vacuum ~ Barometric pressure])
 103R : - 100 ~ 1000 kPa (Compound pressure [Negative pressure ~ Positive pressure])

Pressure reference

R : Compound pressure (Negative pressure ~ Positive pressure)
 A : Absolute pressure (Absolute vacuum ~ Barometric pressure)

Port

Blank : Stem mount
 B : Back mount

Fitting

R2 : R 1/4 (With M5 female screw)
 GF : G 3/8 (Flush diaphragm type)
 G2 : G 1/4 (With M5 female screw)
 VC : 9/16-18UNF (Gasket joint)

Switch output interface

N : NPN open collector
 P : PNP open collector

LIST OF MODEL NUMBERS

Pressure medium	Fitting	Port	Switch output interface	Pressure reference	Gauge		Absolute
				Rated pressure range	-100 ~ 100 kPa	-100 ~ 1000 kPa	0 ~ 100 kPa abs
Corrosive gases/ liquids compatible with SUS 316L	R 1/4	Stem mount	NPN		PG-35-102R-NR2	PG-35-103R-NR2	PG-35-102A-NR2
		Back mount			➔ PG-35-102R-NR2B	➔ PG-35-103R-NR2B	➔ PG-35-102A-NR2B
		Stem mount	PNP		PG-35-102R-PR2	PG-35-103R-PR2	PG-35-102A-PR2
		Back mount			➔ PG-35-102R-PR2B	➔ PG-35-103R-PR2B	➔ PG-35-102A-PR2B
	G 3/8	Stem mount	NPN		PG-35-102R-NGF	PG-35-103R-NGF	PG-35-102A-NGF
			PNP		PG-35-102R-PGF	PG-35-103R-PGF	PG-35-102A-PGF
	9/16-18UNF	Stem mount	NPN		PG-35-102R-NVC	PG-35-103R-NVC	PG-35-102A-NVC
		Back mount			➔ PG-35-102R-NVCB	➔ PG-35-103R-NVCB	➔ PG-35-102A-NVCB
		Stem mount	PNP		PG-35-102R-PVC	PG-35-103R-PVC	PG-35-102A-PVC
		Back mount			➔ PG-35-102R-PVCB	➔ PG-35-103R-PVCB	➔ PG-35-102A-PVCB
	G 1/4	Stem mount	NPN		PG-35-102R-NG2	PG-35-103R-NG2	PG-35-102A-NG2
			PNP		PG-35-102R-PG2	PG-35-103R-PG2	PG-35-102A-PG2

※Verify the above model numbers when placing orders.

The products marked ➔ are manufactured upon receipt of order basis.

ACCESSORIES (Sold separately)

Name	Series name	Contents	Applicable model
Panel holder set	ACPG-003	Panel holder cover Panel holder Panel stopper (2pcs.)	PG-30 · PG-35 · PG-35H · PG-35L
Holder cover set (For protecting gauge operating panel)	ACPG-004	Panel holder cover Panel holder	PG-30 · PG-35 · PG-35H · PG-35L

ENVIRONMENTAL CHARACTERISTICS

Test item	試験条件 Test conditions	変動量 Permissible change
Vibration	10 ~ 500 Hz, 98.1 m/s ² or 1.5 mm P-P, 3 directions for 2 hours each	± 2 %F.S. maximum after test ※1 [Amount of analog output fluctuation is permitted by adding conversion error of 20 mV.]
Shock	490 m/s ² , 3 directions for 3 times each	
Pressure cycling	0 ~ Rated pressure、10 ⁶ cycles	
Moisture resistance	40 °C, 90 ~ 95 %RH, 240 hrs.	
EMC	EMI : EN55011: 2007, A2 : 2007 Group 1, class B EMS : EN61326-1 : 2006 Table 2	Pressure indication, switch operating pressure and analog output : ± 5 %F.S. maximum during test ※1

※1 Change in the pressure indication, switch operating points and analog output.

PG-35

PRESSURE GAUGES

STANDARD SPECIFICATIONS

● Unless otherwise specified, the specs are defined at an ambient temperature of 25±5 °C and excitation voltage of 12 V DC.


Item / Model number		PG-35		
		102R	103R	102A
General specifications	Pressure reference	Gauge		Absolute
	Pressure medium	Corrosive gases/liquids compatible with SUS 316L		
	Rated pressure range kPa	– 100 ~ 100	– 100 ~ 1000	0 ~ 100 (abs)
	Maximum pressure kPa	200	2000	200 (abs)
	Break-down pressure kPa	300	3000	300 (abs)
	Operating temp. range °C	– 10 ~ 50		
	Compensated temp. range °C	0 ~ 50		
	Operating humidity %RH	35 ~ 85		
	Protection grade	In accordance with IEC IP-65		
	Type of mounting	Stem mount, Back mount		
	Material of pressure port attachment	SUS 316L		
	Net weight g	Approx. 150 (Including 2 m cable)		
	Thermal error	± 3 %F.S. (0 ~ 50 °C)		
	Insulation resistance	100 MΩ minimum (DC500 V)		
	Dielectric strength	AC500 V 1 minute (Leakage current 1 mA maximum)		
	Input voltage	10.8 ~ 30 V DC (Including ripple percentage)		
	Consumption current	50 mA maximum		
Display	Display element	Full 3-digit LED		
	Rated display range kPa	– 99.9 ~ 99.9	– 100 ~ 999	0.0 ~ 99.9
	Multiplier settings	Max. 11 settings		
	Negative pressure display	Red LED is ON.		———
	Display accuracy	± 1 %		
Switch output	Output status	NPN/PNP		
		2-point output (Transistor, Open collector output)		
	Output mode	Separate mode / window comparator mode		
	Switching capacity	30 V DC 100 mA Short-circuit protection		
	Residual voltage	1.2 V maximum (NPN), 2.2 V maximum (PNP) (At load current of 100 mA)		
	State indication	Output 1 (Green LED), Output 2 (Red LED) Lighted when output is ON.		
	Switch hysteresis	0 ~ 300 counts Adjustable		
	Repeatability	± 0.2 %F.S. ± 1 count (± 0.3 %F.S. maximum)		
Analog output	Response	Approx. 5, 25, 250, 2500 ms Adjustable		
	Output mode	3 modes		
	Output voltage V zero : Pin=0, V span : Pin=0~Pin (H)	1 ~ 5 V (G/V mode ZERO : 1 ± 0.2 V, SPAN : 4 ± 0.2 V) R mode ZERO : 3 ± 0.2 V, SPAN : 2 ± 0.2 V)		
	Impedance	10 kΩ		
	Resolution	1/204		
	Response	Approx. 5, 25, 250, 2500 ms Adjustable		
Accessories		“O” rings are supplied (G 3/8 : P18, G 1/4 : P15)		

PG-35


PRESSURE GAUGES

INTERNAL ELECTRICAL SCHEMATICS

● NPN

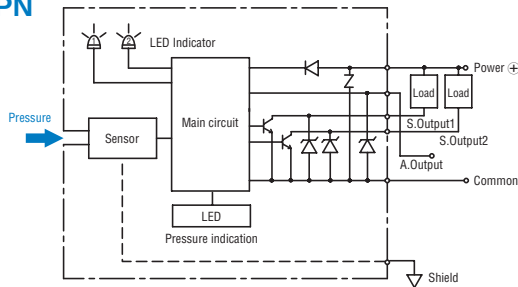

● PNP

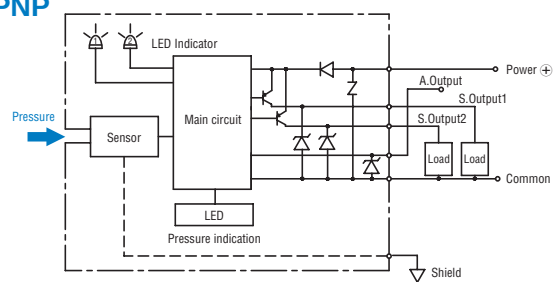

SELECTION OF DISPLAY MULTIPLIER

The last digit/letter represents the selection code : Blinking red LED indicates negative pressure.

Display multiplier		Pressure range (-Pr ~ +Pr)		
		102R	103R	102A
Selection code	1 × 1	-99.9 ~ 99.9	-100 ~ 999	0.0 ~ 99.9 (abs)
	2 × 0.0102		-1.02 ~ 9.99	
	3 × 10.2	-999 ~ 999		0 ~ 999 (abs)
	4 × 7.501	-750 ~ 750		0 ~ 750 (abs)
	5 × 102			
	6 × 0.01		-1.00 ~ 9.99	
	7 × 10	-999 ~ 999		0 ~ 999 (abs)
	8 × 0.145	-14.5 ~ 14.5	-14 ~ 145	0.0 ~ 14.5 (abs)
	9 × 0.000145			
	A × 0.001		-0.10 ~ 1.00	
	b × 0.2953	-29.5 ~ 29.5	-29 ~ 295	0.0 ~ 29.5 (abs)

Diagonal column: Display multiplier cannot be selected due to resolution and number of digits. (Selection code is not indicated either.) Selection code is set at "1" prior to shipment.

ANALOG OUTPUT MODE

Pressure range		-Pr	0	Pr
		←-----→		
1	R mode	1 V		5 V
2	G mode		1 V	5 V
3	V mode	5 V	1 V	


When shipped from our factory : 102R : V mode is set at "3" and 102A, 103R : G mode is set at "2". In case of 102R and 103R, R/G/V mode can be set at "1", "2" or "3" (However, the accuracy at V mode of 103R can't be guaranteed). 102A : Only G mode can be set.

SWITCH OUTPUT MODE

Output	SW1				SW2			
	Separate		Window comparator		Separate		Window comparator	
Mode	HI	LO	A	B	HI	LO	A	B
Operation								
1	○				○			
2	○				○	○		
3		○				○		
4		○				○		
5			○				○	
6			○				○	○
7				○				○
8				○				○
Pressure setting (Operating point)	Setting 1		(Lower limit) : Setting 1 (Upper limit) : Setting 2		Setting 2		(Lower limit) : Setting 1 (Upper limit) : Setting 2	

Note 1. In the Separate Mode, setting 1 corresponds to SW1, and Setting 2 corresponds to SW2.

Note 2. In the Window Comparator Mode, the minimum value for SW1 and SW2 corresponds to Setting 1 and the maximum value corresponds to Setting 2.

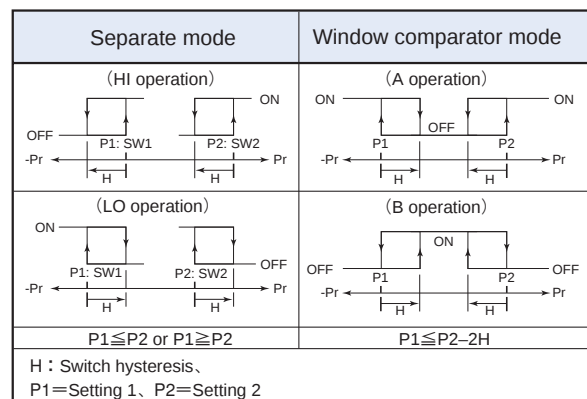

PG-35


PRESSURE GAUGES

OUTLINE DIMENSIONS


PG-35

Unless otherwise specified tolerance : ± 0.5 (Unit: mm)


Configurations of joint R2 type

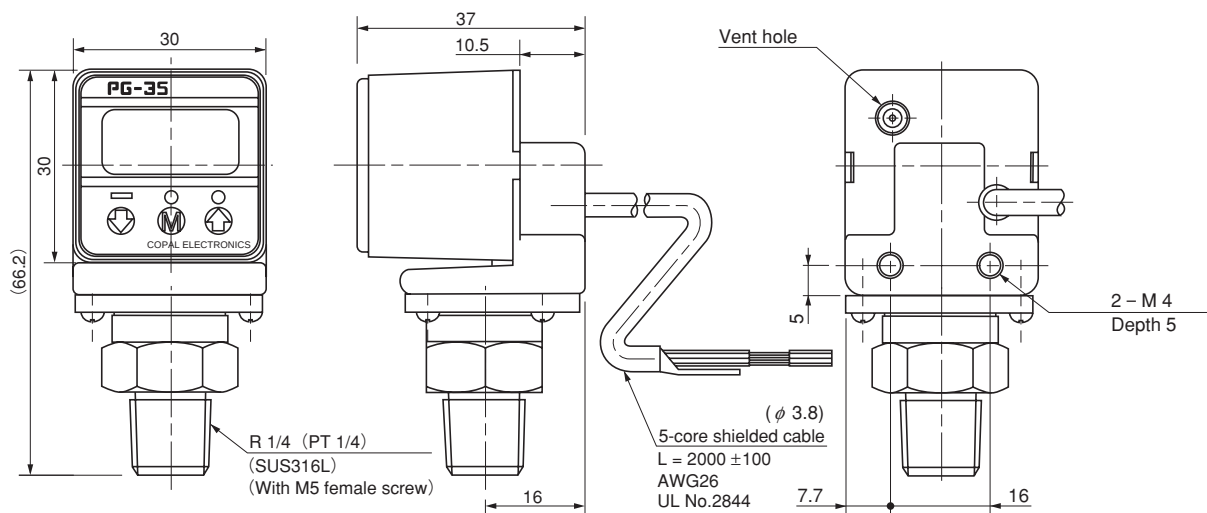


Configurations of joint VC type

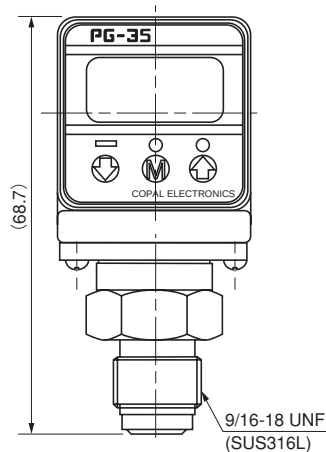

Configurations of joint GF type

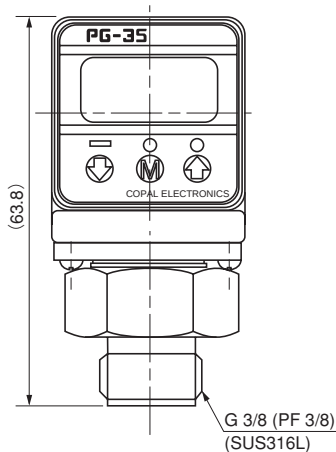

Configurations of joint G2 type

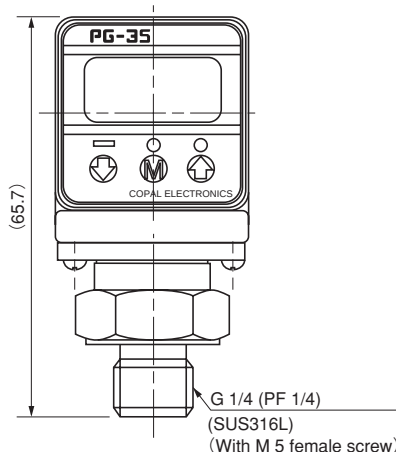

Extra care should be taken with the diaphragm part. Do not touch the diaphragm directly to avoid damaging the diaphragm.


Wire color	Connection
Brown	Power $\oplus$
Gray	Analog output
Black	Switch output 1
White	Switch output 2
Blue	Common
Shield	Fitting

PG-35 PRESSURE GAUGES

OUTLINE DIMENSIONS

Unless otherwise specified tolerance : ± 0.5 (Unit: mm)

PG-35-B (R2)

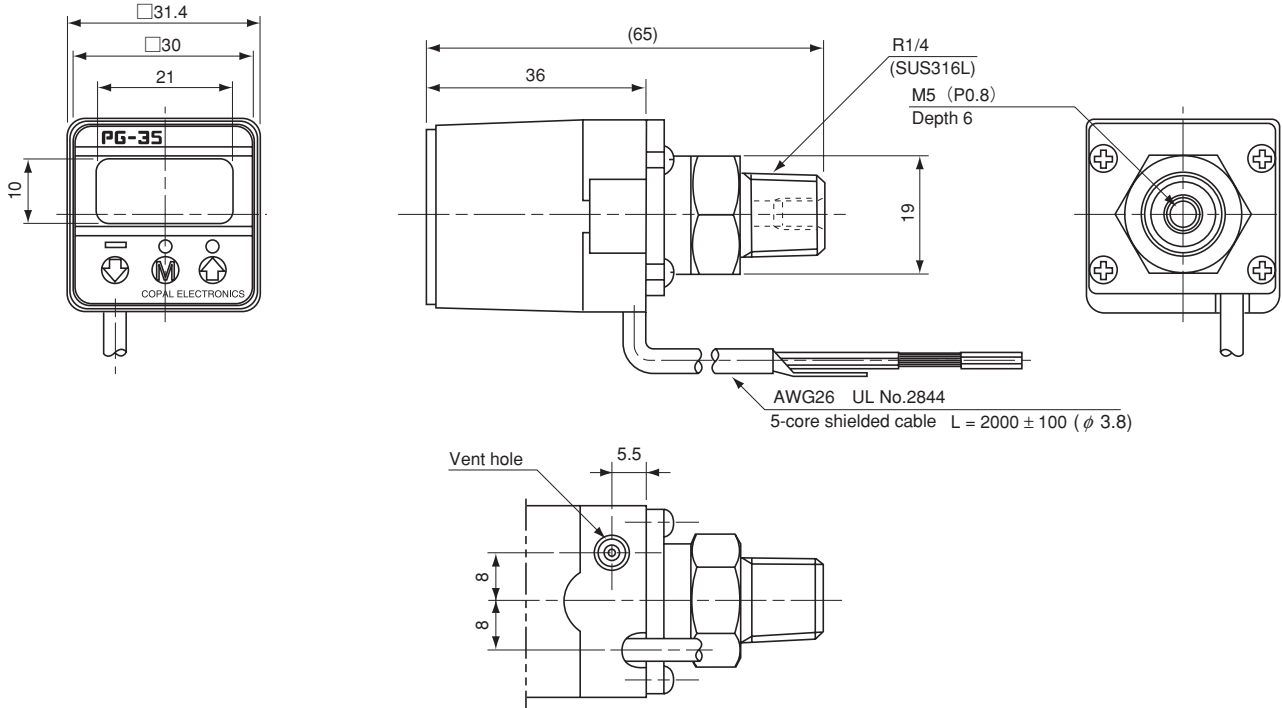

PG-35-B (VC)

